


SYSTEM

- Illuminate a single desk with two presenters.
- Creates a high level “pool” of medium zone lighting.
- Excellent for:
 - Bureaus/Newsrooms or small presentation studios.
 - Distance learning environments.
 - Large Chromakey wall.
- Light weight fixtures can be hung from suspended ceilings.
- Available in non-dimming and dimming configurations.

LAYOUT

This package is designed to light a single small desk with 1 or 2 Talent positions.

Single Modular unit is used for backlight for both positions from no more that 6’ away. Two Modular Double units are crossed (see illustration) on the Talent positions, 7’ from talent and 7’-8’

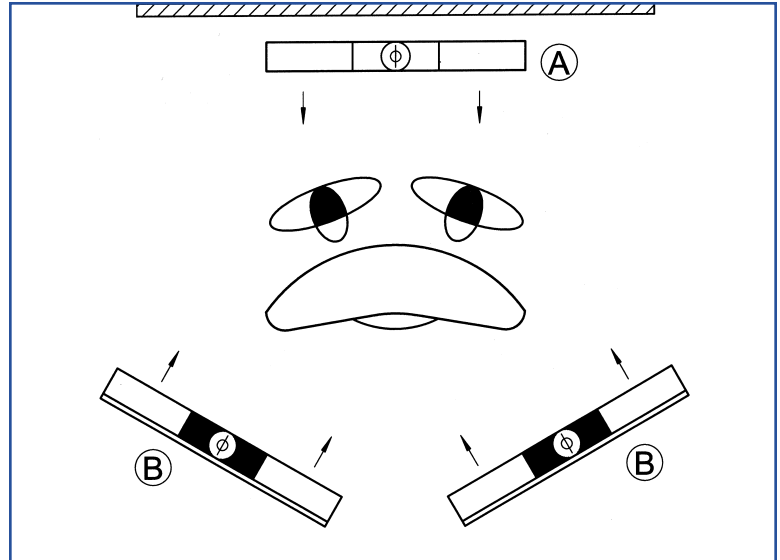

off of the floor. Adjustable hangers are available if required. Light level will average 90-120 fc in the talent zone and on the wall. With all fixtures “full on,” power consumption will be less than 600 watts.

COMPONENTS

120 Volt Non-Dimming (NDFP7-1)

Type	Qty	Model	Description
Ⓐ	1	M110-255BX-120	Modular Non-Dim Fixture
Ⓑ	2	M110-255BX2-120	Modular Non-Dim Fixture

Note: Adjustable hangers may be required

120 Volt Dimming (DFP7-1)

Type	Qty	Model	Description
Ⓐ	1	M110-255BX-D/PM-120	Modular w/Phase Control Dim
Ⓑ	2	M110-255BX2-D/PM-120	Modular w/Phase Control Dim
	*1	DC-V-I0	12 Channel Vista 10 Control
	*1	DC-4X600	VID Strip 4 circuit X 600 watts
	*1	CB-C-DMX50	50’ DMX Cable
	*1	CB-D-GG15	15’ Power Cable (GTL Plug)

Note: Adjustable hangers may be required

230 Volt Non-Dimming (NDFP7-2)

Type	Qty	Model	Description
Ⓐ	1	M110-255BX-230	Modular Non-Dim Fixture
Ⓑ	2	M110-255BX2-230	Modular Non-Dim Fixture

Note: Adjustable hangers may be required

230 Volt Dimming (DFP7-2)

Type	Qty	Model	Description
Ⓐ	1	M110-255BX-DMX-230	Modular w/ DMX Dimming
Ⓑ	2	M110-255BX2-DMX-230	Modular w/ DMX Dimming
	*1	DC-V-I0	12 Channel Vista 10 Control
	*2	CB-C-DMX25	25’ DMX Cable
	*1	CB-C-DMX50	50’ DMX Cable

Note: Adjustable hangers may be required